


- * SPACER FOR 5/32 INCH THICK DISC
- * TORQUE BOLTS TO 25 FT. LBS.
- * MAX. OPERATING PRESSURE -- 1,000 PSI
- * BUNA N SEALS FOR PETROLEUM BASED OILS
- * USE LOC-TITE #242 ON FRICTION PAD SCREWS

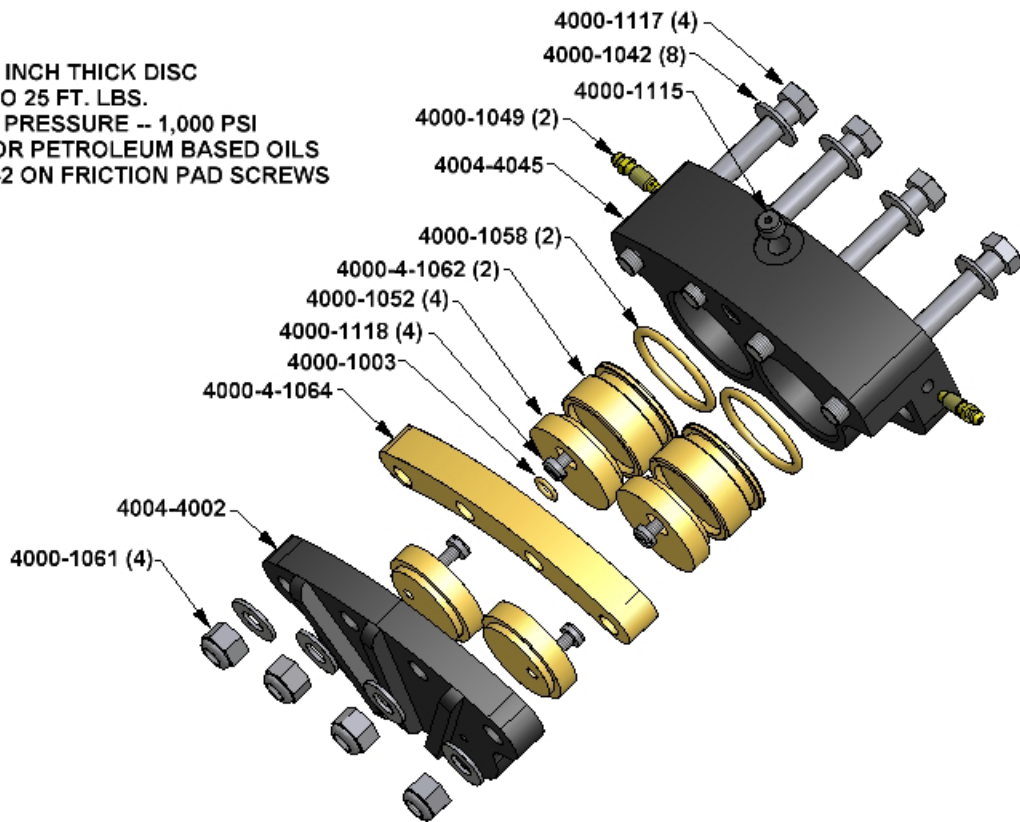

UNLESS OTHERWISE SPECIFIED
 DO NOT SCALE DRAWING
 REMOVE ALL BURRS
 TAP DEPTHS FULL THD.
 DRILL DEPTHS FULL DIA.

TOLERANCES
 2 PLACE $\pm .010$
 3 PLACE $\pm .005$

THREADS
 EXTERNAL CLASS 2A
 INTERNAL CLASS 2B

THIRD ANGLE PROJECTION



DESIGNED BY
WCB 11/20/02
 CHECKED BY
 DATE

SCALE
 CLASS

W.C. BRANHAM INC.
 RIVER FALLS, WI.

T.T.F.

H200SA CALIPER

PRINTING NO.

4004-0000

REVISED