


- * SPACER FOR 1/4 INCH THICK DISC
- * TORQUE BOLTS TO 25 FT. LBS.
- * MAX. OPERATING PRESSURE -- 1,000 PSI
- * BUNA N SEALS FOR PETROLEUM BASED OILS
- * USE LOC-TITE #242 ON FRICTION PAD SCREWS

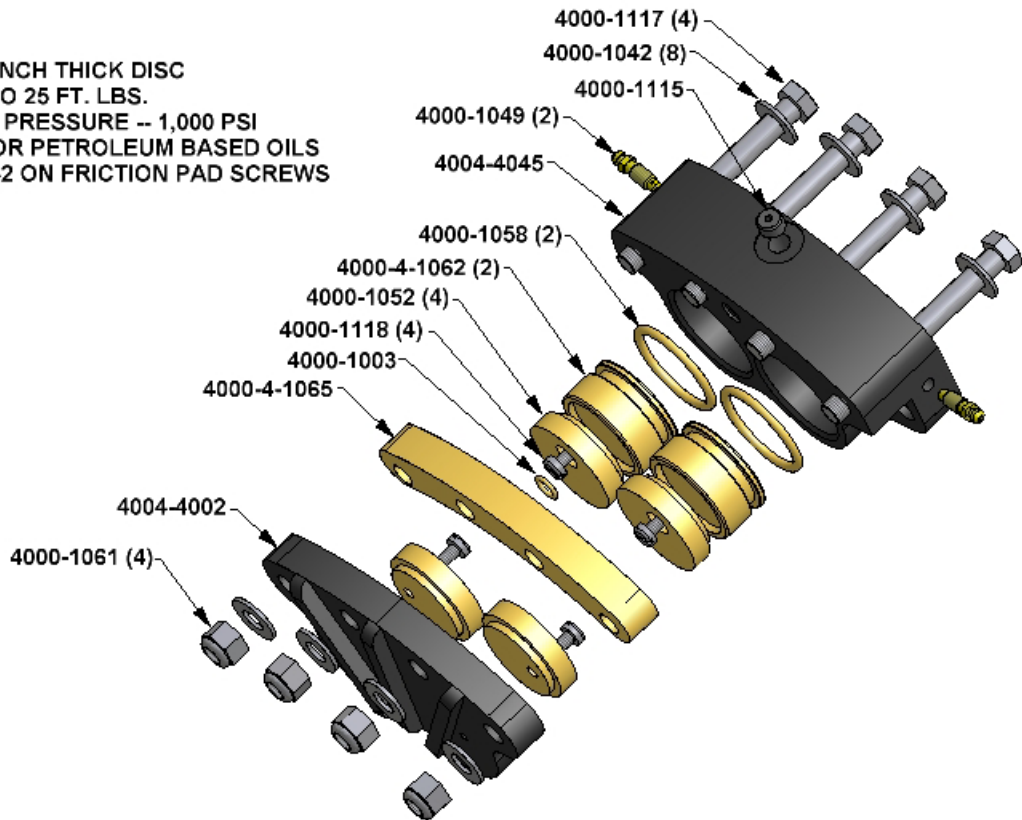

UNLESS OTHERWISE SPECIFIED

DO NOT SCALE DRAWING
REMOVE ALL BURRS
TAP DEPTHS FULL T.D.
DRILL DEPTHS FULL DIA.

FINISHES
2 PLACE ±.010
3 PLACE ±.005

TRENDS
EXTERNAL CLASS 2A
INTERNAL CLASS 2B

THIRD ANGLE PROJECTION



DESIGNER DATE
WCB 11/20/02

CHECKER DATE
SCALE
CLASS

W.C. BRANHAM INC.
RIVER FALLS, WI.

T.T.F.
H200SB CALIPER

PRINTING NO.
4004-0001

REVISION