


- * SPACER FOR 1/4 INCH THICK DISC
- * TORQUE BOLTS TO 25 FT. LBS.
- * MAX. OPERATING PRESSURE -- 1,000 PSI
- * BUNA N SEALS FOR PETROLEUM BASED OILS
- * USE LOC-TITE #242 ON FRICTION PAD SCREWS

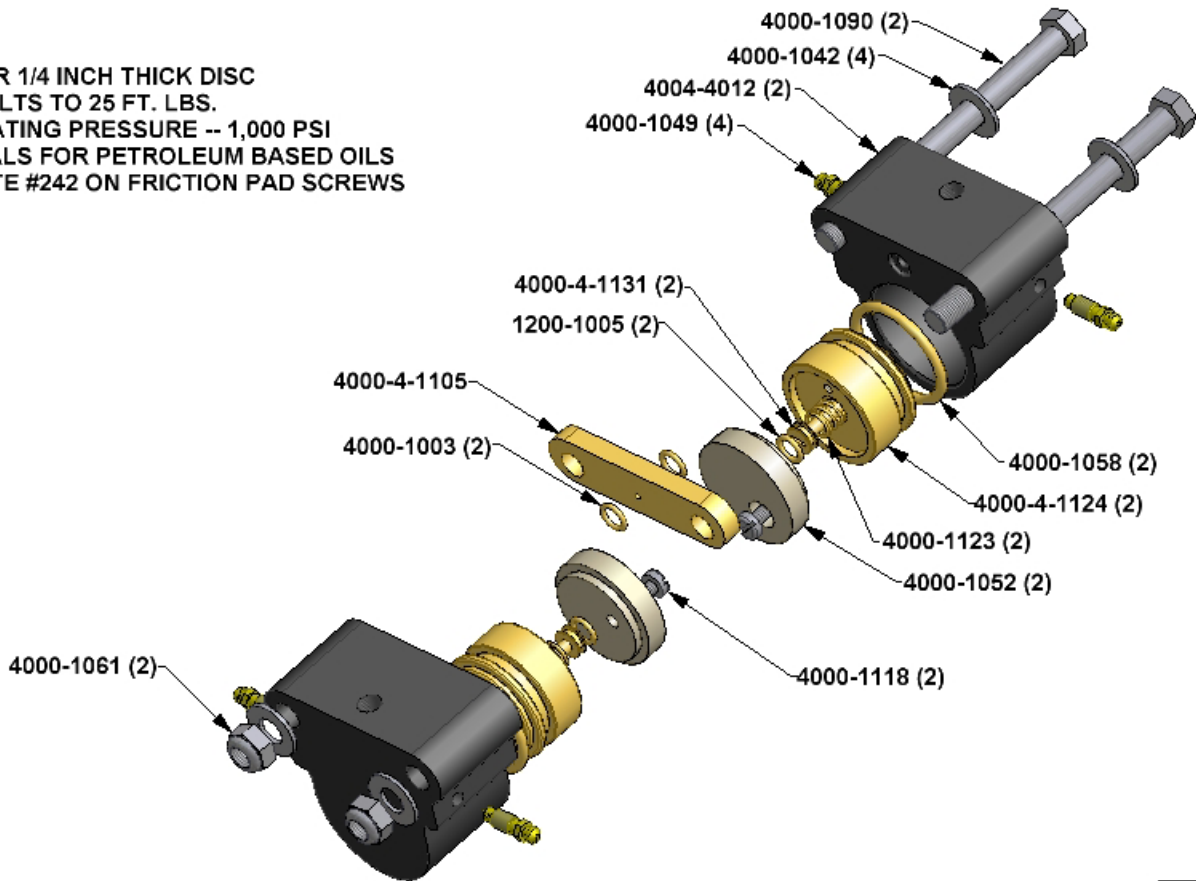

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL BURRS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.	THIRD ANGLE PROJECTION 	W.C. BRANHAM INC. RIVER FALLS, WI.
DATE 11/26/02	BY WCB	TITLE H47DBR CALIPER
EXTERNAL CLASS 2A INTERNAL CLASS 2B	SCALE	DRAWING NO. 4004-0077
	CLASS	REVISION