


- * SPACER FOR 1/4 INCH THICK DISC
- * TORQUE BOLTS TO 25 FT. LBS.
- * MAX OPERATING PRESSURE -- 1,000 PSI
- * BUNA N SEALS FOR PETROLEUM BASED OILS
- * USE LOC-TITE #242 ON FRICTION PAD SCREWS

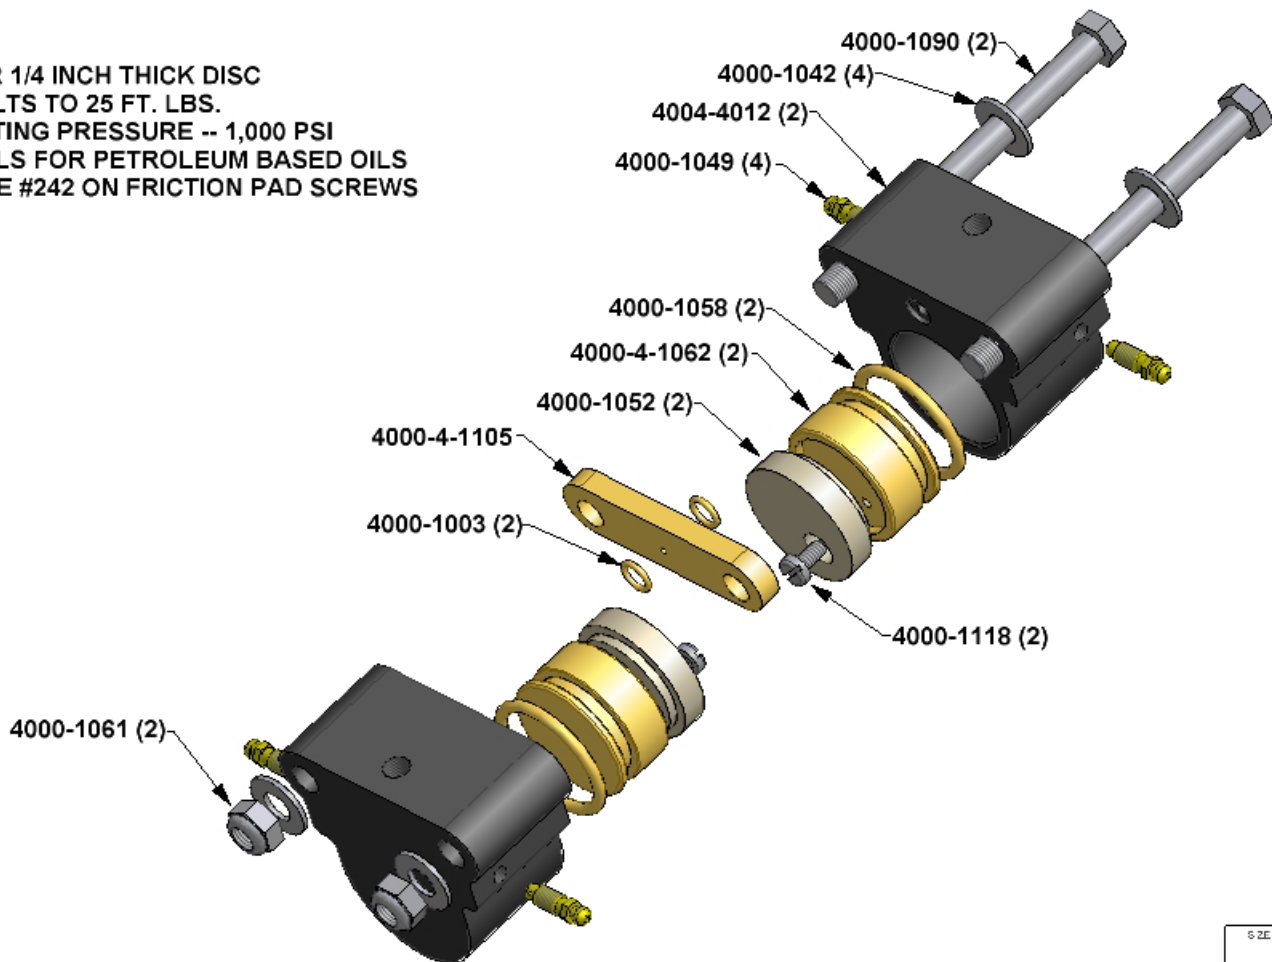

UNLESS OTHERWISE SPECIFIED

DO NOT SCALE DRAWING
REMOVE ALL BURRS
TAP DEPTHS FULL THD
DRILL DEPTHS FULL DIA.

TOLERANCES
2 PLACE $\pm .010$
3 PLACE $\pm .005$

EXTERNAL CLASS 2A
INTERNAL CLASS 2B

THIRD ANGLE PROJECTION



DESIGNER
WCB 11/25/02

CHECKER DATE

SCALE

CLASS

W.C. BRANHAM INC.
RIVER FALLS, WI.

TITLE
H47DB CALIPER

DRAWING NO.
4004-0033

SIZE

REVISION