


- * SPACER FOR 3/8 INCH THICK DISC
- * TORQUE BOLTS TO 25 FT. LBS.
- * MAX. OPERATING PRESSURE -- 1,000 PSI
- * EPR SEALS FOR DOT 3 BRAKE FLUID
- * USE LOC-TITE #242 ON FRICTION PAD SCREWS

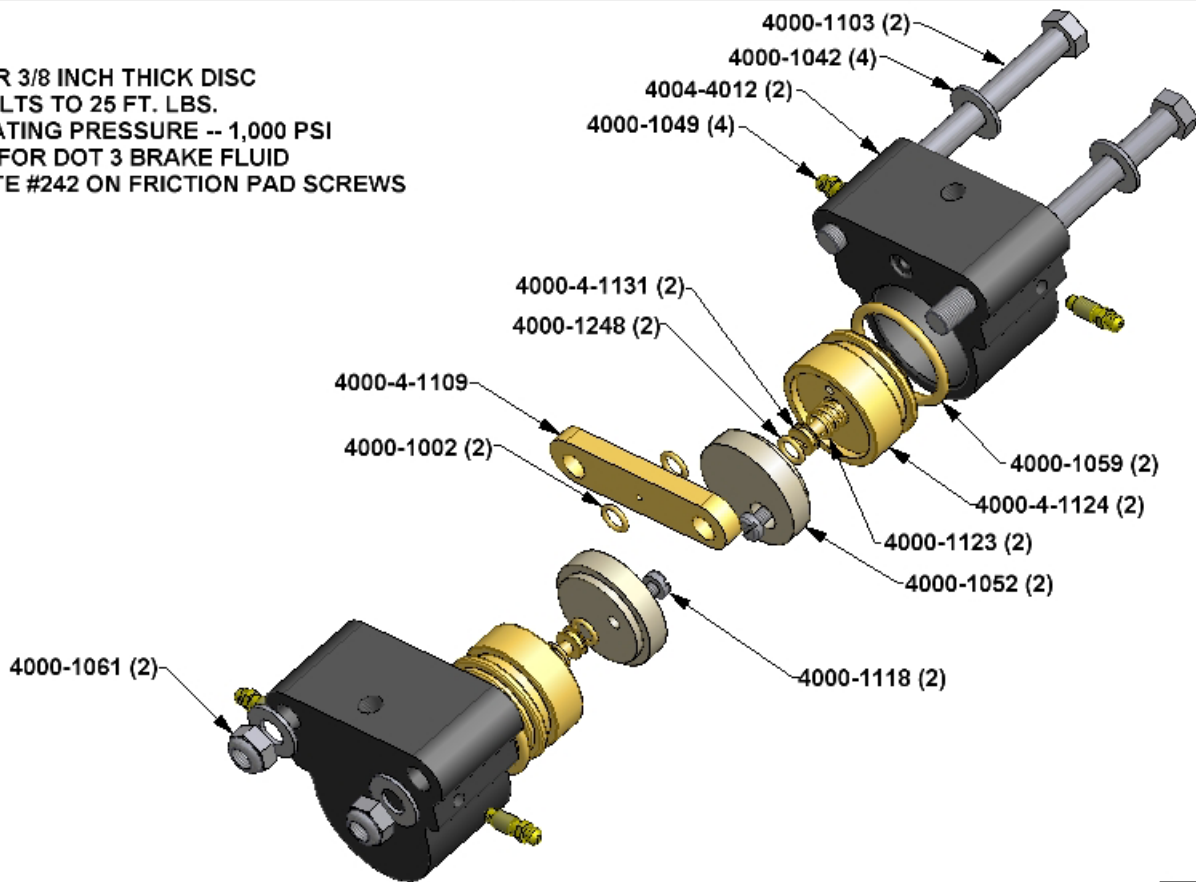

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL SURFS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.	THIRD ANGLE PROJECTION	W.C. BRANHAM INC. RIVER FALLS, WI.	
		TITLE	H47DLRG CALIPER
C1 1/8" DIA. 1/2" P. AC. 1/4" DIA. S. PLACE - .005 TYPICAL	DWG. NO. DATE WCB 11/26/02	CHECKER	DR. E.
EXTERNAL CLASS 2A INTERNAL CLASS 2B	SCALE	DRAWING NO. 4004-0082	
	CLASS	REVISION	