


- \* SPACER FOR 3/8 INCH THICK DISC
- \* TORQUE BOLTS TO 25 FT. LBS.
- \* MAX OPERATING PRESSURE -- 1,000 PSI
- \* BUNA N SEALS FOR PETROLEUM BASED OILS
- \* USE LOC-TITE #242 ON FRICTION PAD SCREWS

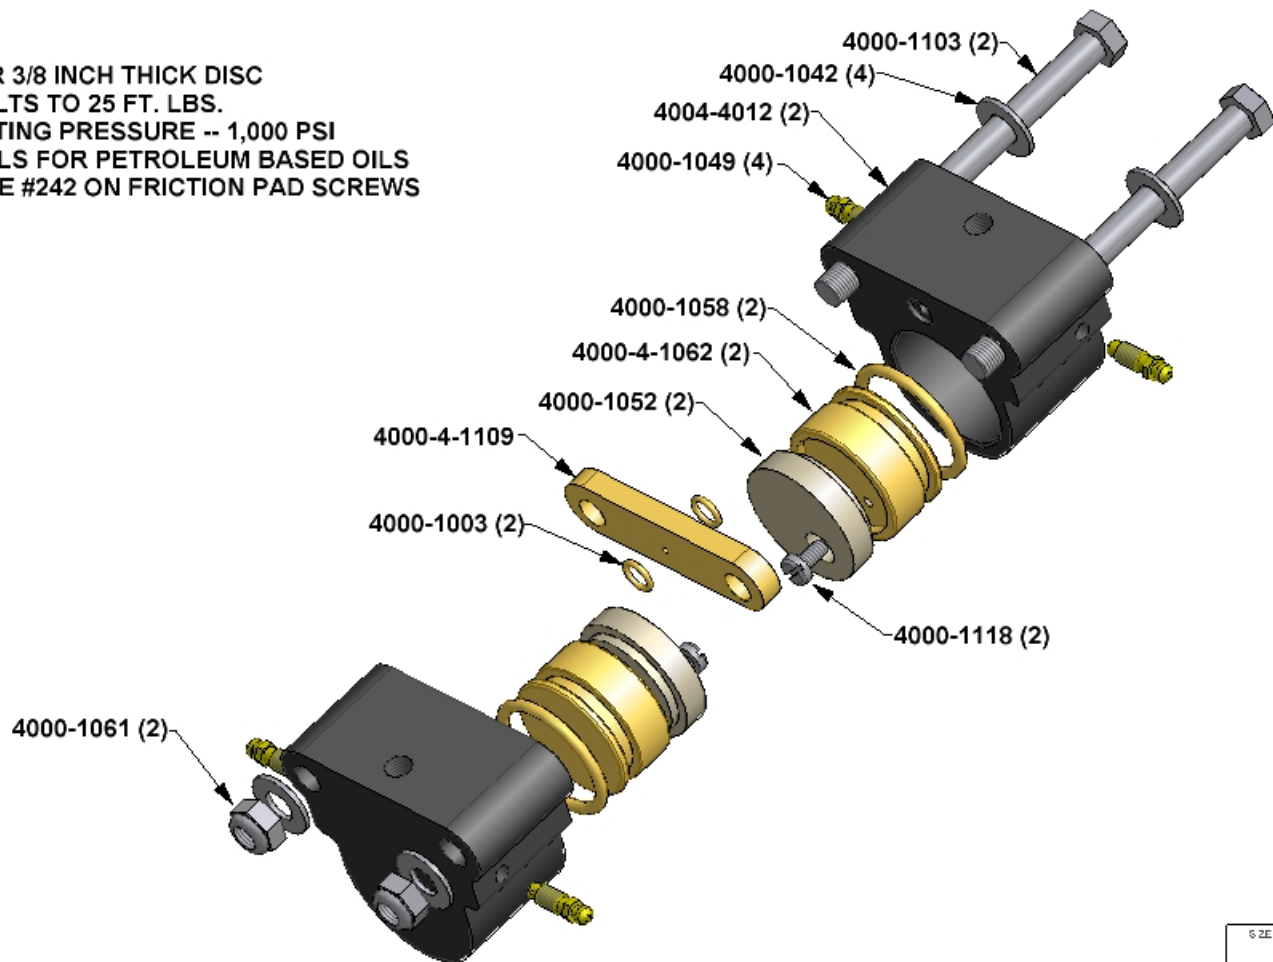

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL BURRS TAP DEPTHS FULL THD DRILL DEPTHS FULL DIA.	THIRD ANGLE PROJECTION		W.C. BRANHAM INC. RIVER FALLS, WI.
	DESIGNER <b>WCB 11/25/02</b>	DATE	
TOLERANCES 2 PLACE $\pm .010$ 3 PLACE $\pm .005$	CHECKER	DATE	DRAWING NO. <b>4004-0034</b>
1 IN A 3/4 EXTERNAL CLASS 2A INTERNAL CLASS 2B	SCALE		REVISION
	CLEARANCE		

SIZE