


- \* FOR USE WITH 5/32 INCH THICK DISC
- \* TORQUE BOLTS TO 25 FT. LBS.
- \* MAX OPERATING PRESSURE -- 1,000 PSI
- \* EPR SEALS FOR DOT 3 BRAKE FLUID
- \* USE LOC-TITE #242 ON FRICTION PAD SCREWS

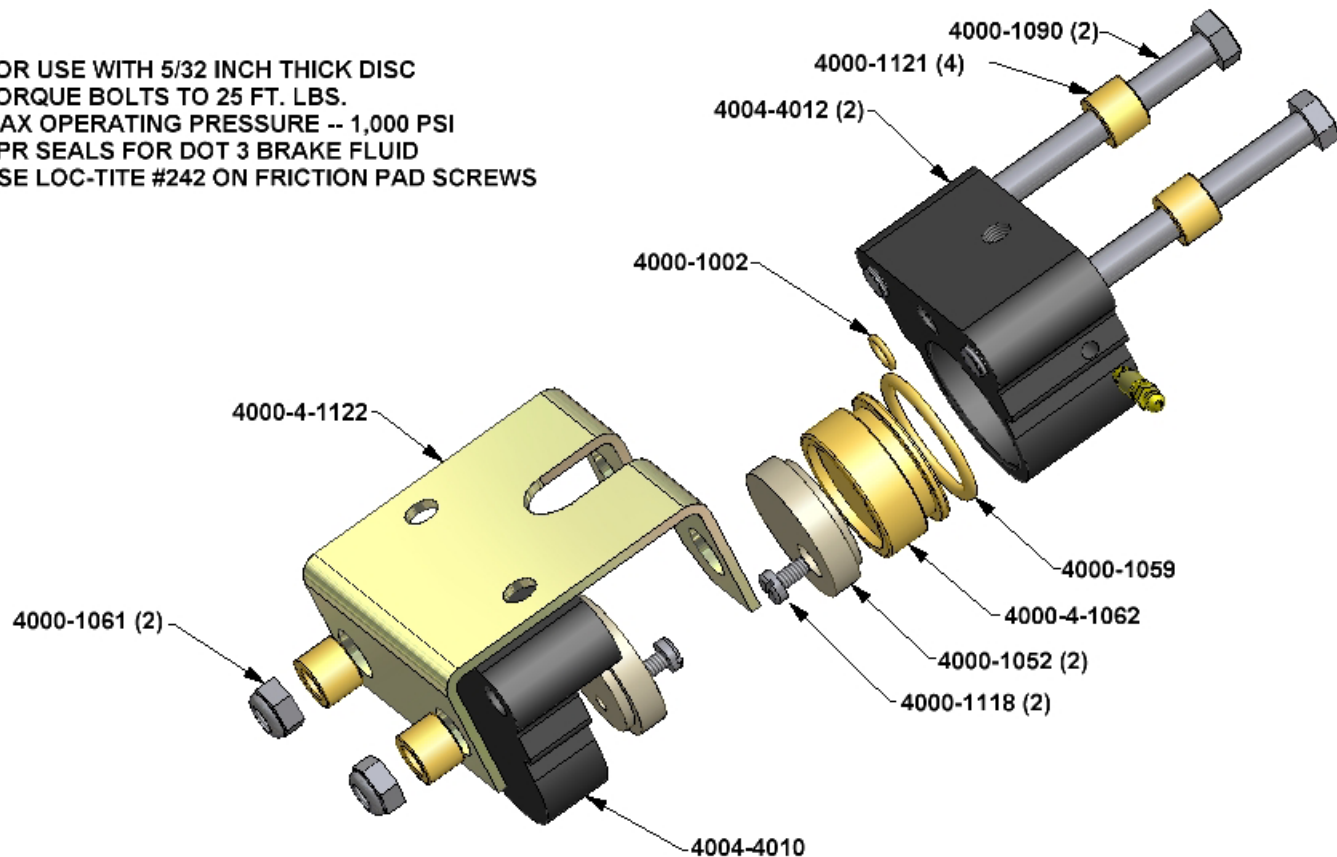

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL BURRS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.	TYPICAL PROJECTION		W.C. BRANHAM INC. RIVER FALLS, WI.
	DESIGNER <b>WCB 11/25/02</b>	DATE	
TO DIMENSIONS 2 PLACE ±.010 3 PLACE ±.005	CHECKER	SCALE	DRAWING NO. <b>4004-0088</b>
HIP & D: EXTERNAL CLASS 2A INTERNAL CLASS 2B	CLASS	REVISION	

3 ZE