* SPACER FOR 3/8 INCH THICK DISC
* TORQUE BOLTS TO 25 FT. LBS.
* MAX. OPERATING PRESSURE -- 1,000 PSI
* EPR SEALS FOR DOT 3 BRAKE FLUID
* USE LOC-TITE #242 ON FRICTION PAD SCREWS

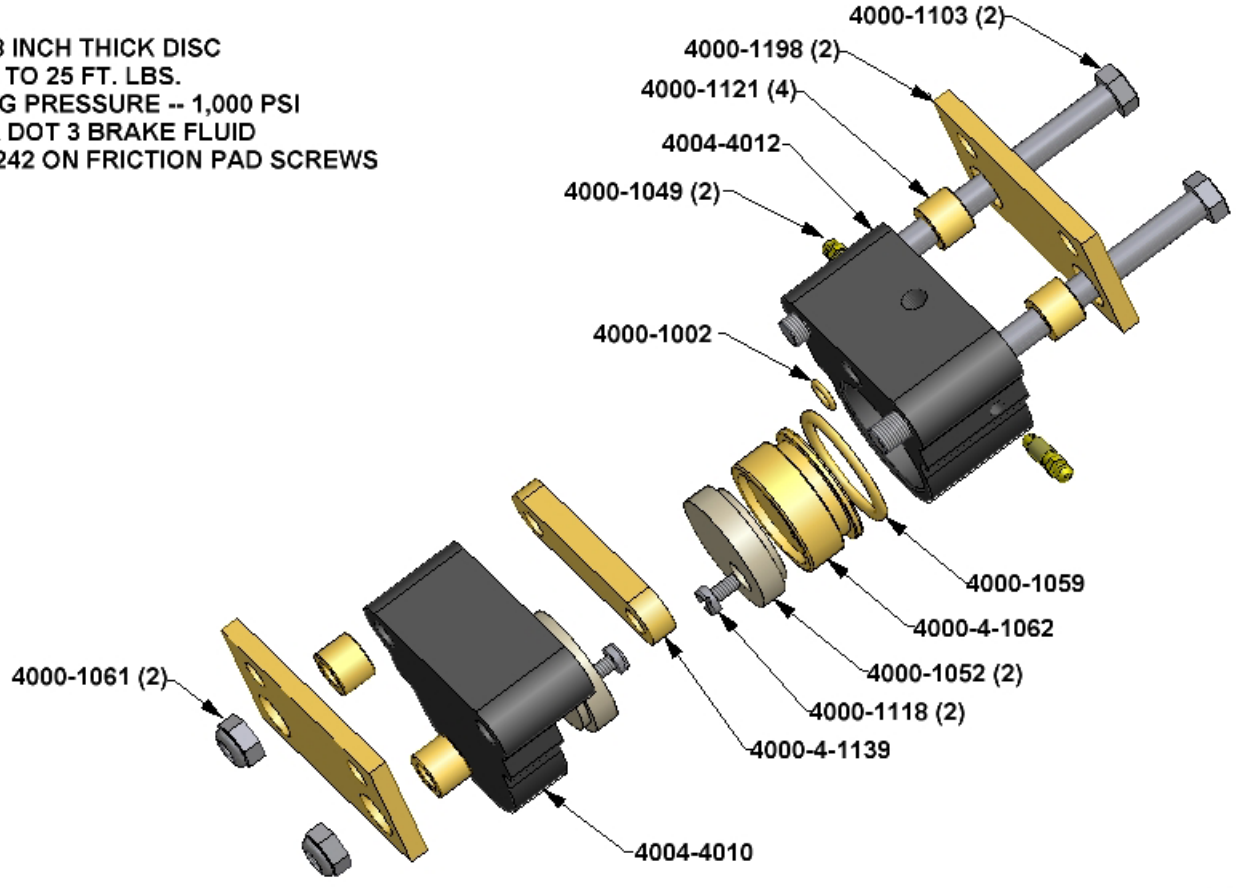

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL BURRS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.	THIRD ANGLE PROJECTION	W.C. BRANHAM INC. RIVER FALLS, WI.
TOLERANCES 2 PLACE +/-.010 3 PLACE +/-.005	DESIGNER DATE WCB 11/25/02	TITLE H47SLFG CALIPER
THREADS EXTERNAL CLASS 2A INTERNAL CLASS 2B	CHECKER DATE SCALE	DRAWING NO. 4004-0090
		REVISION

SIZE