


- \* SPACER FOR 1/4 INCH THICK DISC
- \* TORQUE BOLTS TO 12 FT. LBS.
- \* MAX. OPERATING PRESSURE -- 200 PSI
- \* BUNA N SEALS
- \* USE LOC-TITE # 242 ON FRICTION PAD SCREWS

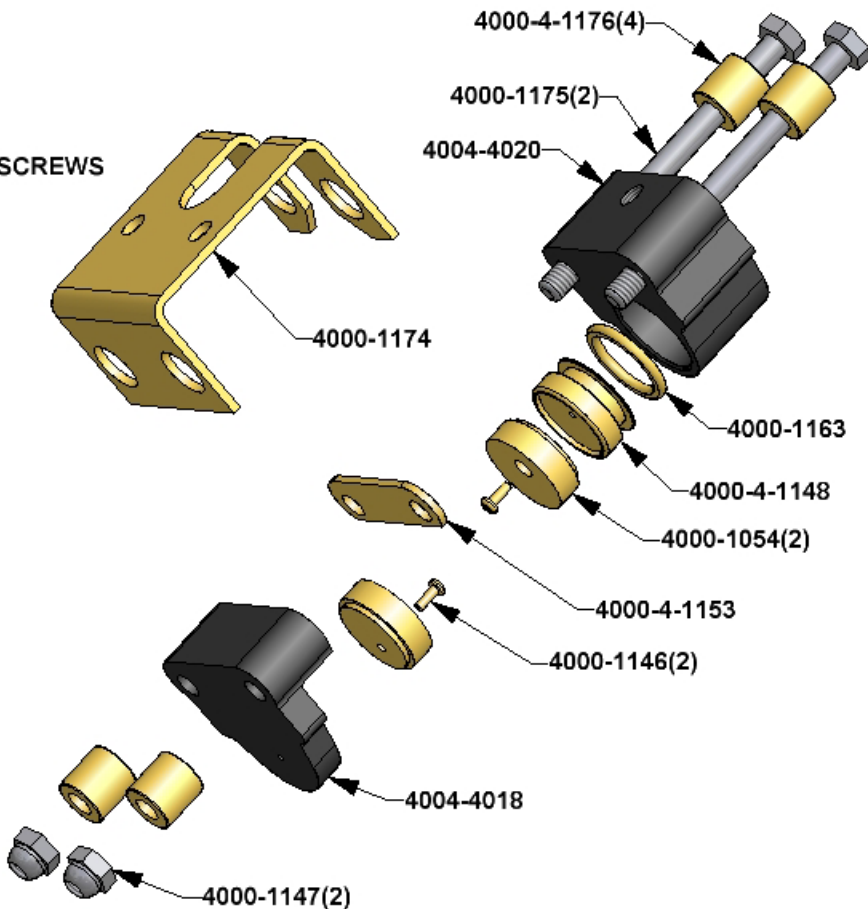

UNLESS OTHERWISE SPECIFIED

DO NOT SCALE DRAWING  
REMOVE ALL BURRS  
TAP DEPTHS FULL THD.  
DRILL DEPTHS FULL DIA.

TOLERANCES  
2 PLACE  $\pm .010$   
3 PLACE  $\pm .005$

EXTERNAL CLASS 2A  
INTERNAL CLASS 2B

THIRD ANGLE PROJECTION



DESIGNER  
**WCB 12/01/02**

CHECKER DATE

SCALE

DATE

W.C. BRANHAM INC.  
RIVER FALLS, WI.

TITLE  
**P38SBF CALIPER**

DRAWING NO.  
**4004-0700**

SIZE  
**C**

REVISION