


- * SPACER FOR 5/32 INCH THICK DISC
- * TORQUE BOLTS TO 12 FT. LBS.
- * MAX. OPERATING PRESSURE -- 200 PSI
- * BUNA N SEALS
- * USE LOC-TITE #242 ON FRICTION PAD SCREWS

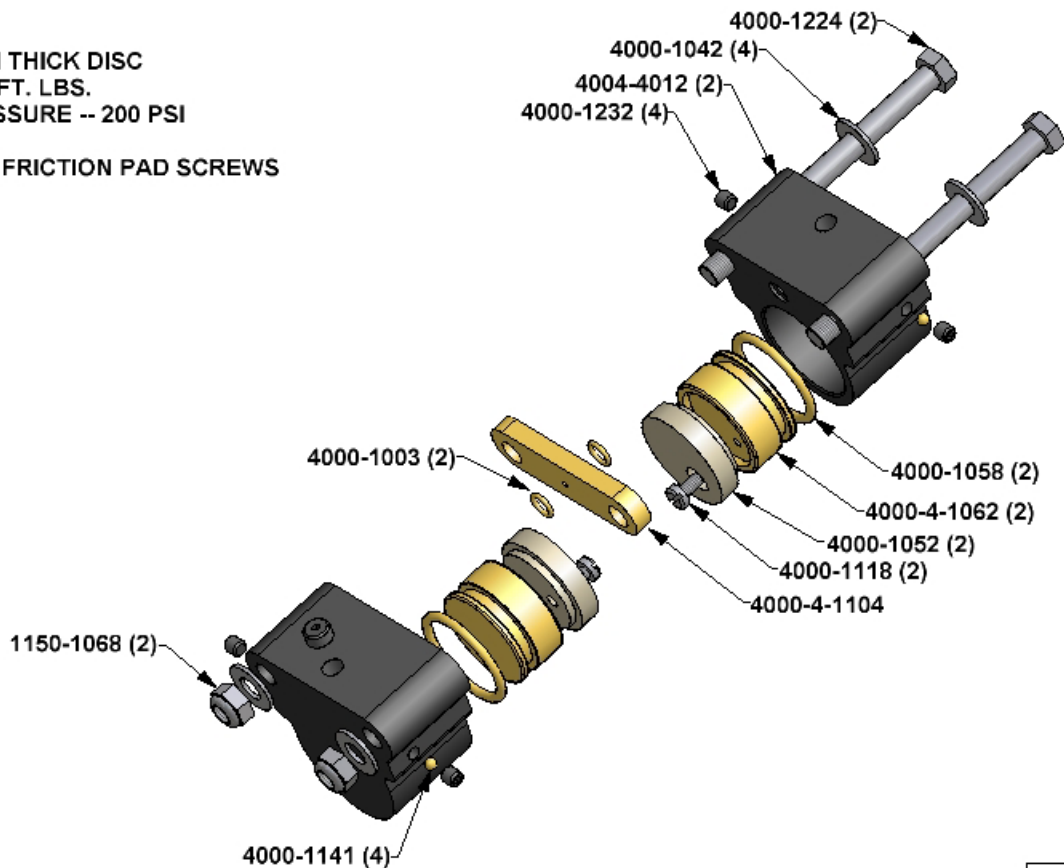

UNLESS OTHERWISE SPECIFIED	THIRD ANGLE PROJECTION	W.C. BRANHAM INC. RIVER FALLS, WI.	
DO NOT SCALE DRAWING REMOVE ALL BURRS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.		TITLE	
CD. DIMENSIONS 2 PL. ACH. ±.010 S PLACE ±.005	DATE WCB 12/02/02	P47DA CALIPER	
FINISHES: EXTERNAL CLASS 2A INTERNAL CLASS 2B	DESIGNER DA. B.	MANUFACTURED	REVISION
	SCALE	4004-0025	
	CLASS		

SIZE