


- \* BUILT - IN SPACER FOR 5/32 INCH THICK DISC
- \* TORQUE BOLTS TO 12 FT. LBS.
- \* MAX. OPERATING PRESSURE -- 200 PSI
- \* BUNA N SEALS
- \* USE LOC-TITE #242 ON FRICTION PAD SCREWS

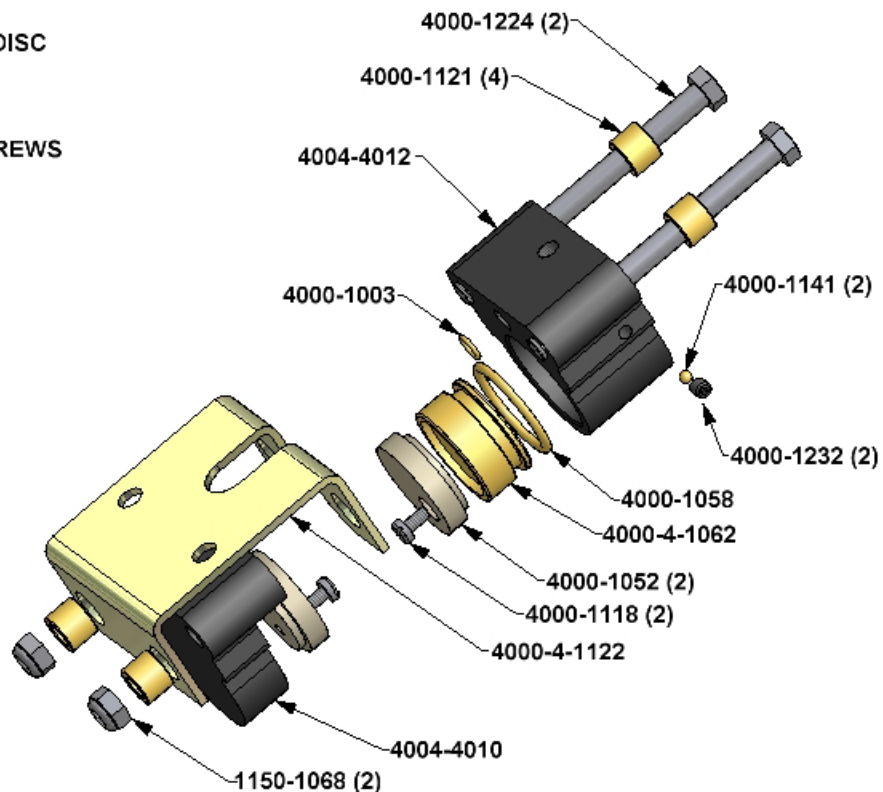

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL BURRS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.	THIRD ANGLE PROJECTION		W.C. BRANHAM INC. RIVER FALLS, WI.
	C1: DIMENSIONS 2 P. ACFT ±.010 3 PLACE ±.005	D: SKETCH <b>WCB 12/02/02</b>	
1: AREA 2: EXTERNAL CLASS 2A INTERNAL CLASS 2B	CHECKER	DR. E.	(DRAWING NO.) <b>4004-0040</b>
	SCALE		REVISION
	CLASS		